

CURRENT 2.0 Ampere  
VOLTAGE RANG 50 to 1000 Volts


**DB201S THRU DB207S**

## Features

- This series is SGS listed under the Recognized Component Index, file number SZXEC1902259902
- The plastic material used carries Underwriters Laboratory flammability recognition 94V-0
- Surge overload ratings to 50 amperes
- Ideal for printed circuit board application
- High temperature soldering guaranteed 265 °C /10 seconds at 5 lbs (2.3kg) tension

## Mechanical Data

Case: Molded plastic  
Terminals: Plated leads solderable per MIL-STD-202, Method 208  
Polarity: Marked on body  
Mounting Position: Any  
Weight: 0.04 ounce, 1.0 grams (approx)

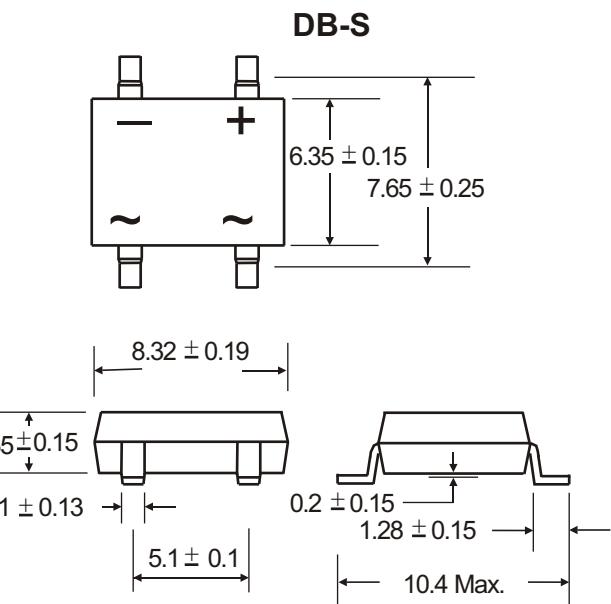

Dimensions in millimeters ( 1mm = 0.0394" )

## Maximum Ratings & Thermal Characteristics

Rating at 25°C ambient temperature unless otherwise specified, Resistive or Inductive load, 60 Hz.  
For Capacitive load derate current by 20%.

Parameter	Symbol	DB201S	DB202S	DB203S	DB204S	DB205S	DB206S	DB207S	unit
Maximum repetitive peak reverse voltage	VRRM	50	100	200	400	600	800	1000	V
Maximum RMS bridge input voltage	VRMS	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	VDC	50	100	200	400	600	800	1000	V
Maximum average forward rectified output current at TA=40°C	IF(AV)								A
Peak forward surge current single sine-wave superimposed on rated load (JEDEC Method)	IFSM								A
Rating for fusing ( t<8.3ms)	I <sup>2</sup> t								A <sup>2</sup> sec
Typical thermal resistance per element (1)	ReJA								°C / W
Typical junction capacitance per element (2)	C <sub>j</sub>								pF
Operating junction and storage temperature range	T <sub>J</sub> , T <sub>STG</sub>						-55 to + 150		°C

## Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified. Resistive or Inductive load, 60Hz.  
For Capacitive load derate by 20 %.

Parameter	Symbol	DB201S	DB202S	DB203S	DB204S	DB205S	DB206S	DB207S	Unit
Maximum instantaneous forward voltage drop per leg at 1.0A	VF						1.0		V
Maximum DC reverse current at rated TA =25°C DC blocking voltage per element TA =125°C	IR				10	500			μA

**Notes:** (1)Thermal resistance from Junction to Ambient on P.C.board mounting.


(2)Measured at 2.0MHz and applied reverse voltage of 4.0 volts.

CURRENT 2.0 Ampere  
VOLTAGE RANG 50 to 1000 Volts


**DB201S THRU DB207S**

**Rating and Characteristic Curves** (  $T_A = 25^\circ\text{C}$  Unless otherwise noted )


**Fig. 1 Derating Curve for Output Rectified Current**

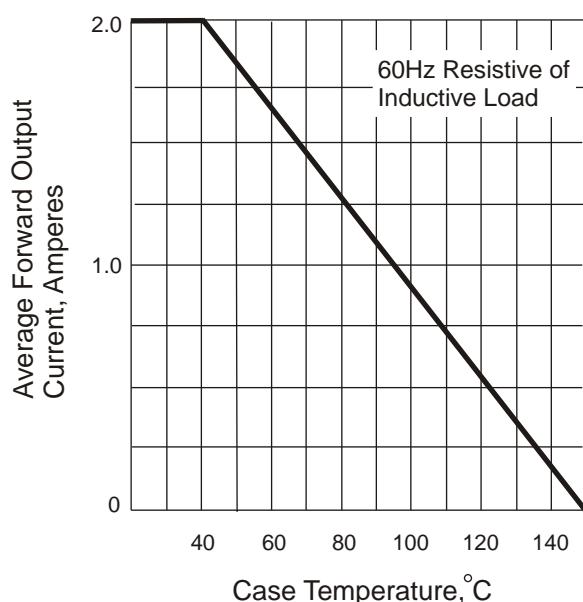


**Fig. 2 Maximum Non-repetitive Peak Forward Surge Current**

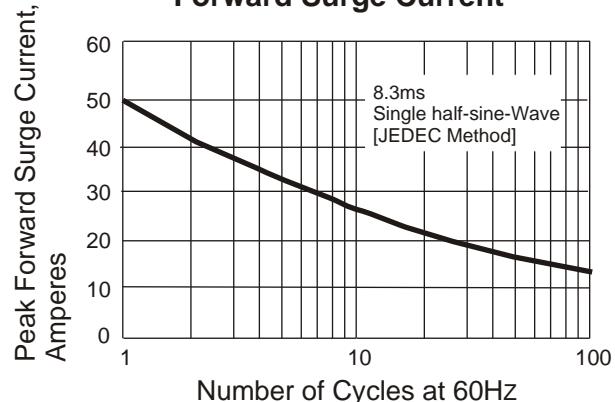

**Fig. 4 Typical Revers Characteristics**

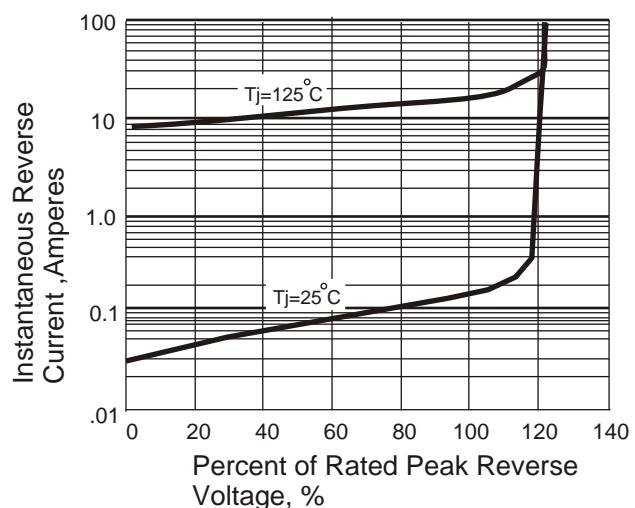

**Fig. 3 Typical Instantaneous Forward Characteristics**

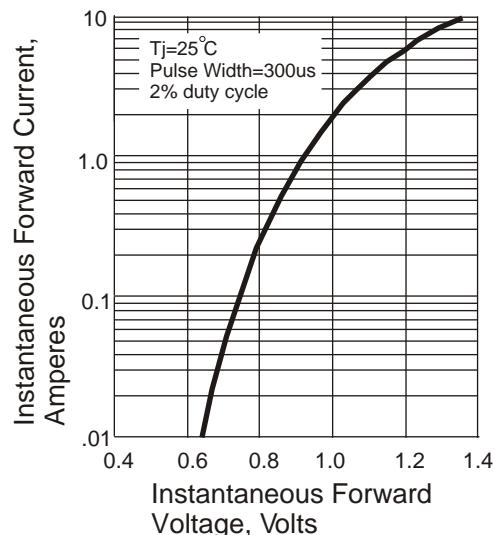

**Fig. 5 Typical Junction Capacitance**

